

CD600 SPECIFICATION


CD600-B / CD600-P

CHANNEL DRAIN FOR TILED FLOORS
FOR USE WITH TILES 8mm - 16mm




Component Parts

- 1 X Cover Plate - Reversible.
- 1 X Frame.
- 1 X Channel Drain Body.
- 1 X 1½" X 50mm Water Seal Trap with Top Access.
- 2 X Adjustable Legs.
- 2 X Centre Plastic Guides with four 10mm screws.
- 2 X End Plastic Guides with four 10mm screws.
- 1 X Fittings bag containing:
 - 8 X 15mm Screws.
 - 8 X 4mm Plastic Spacers.
 - 16 X 2mm Plastic Spacers.
- 1 X Suction Pad. (For Removing Cover Plate)

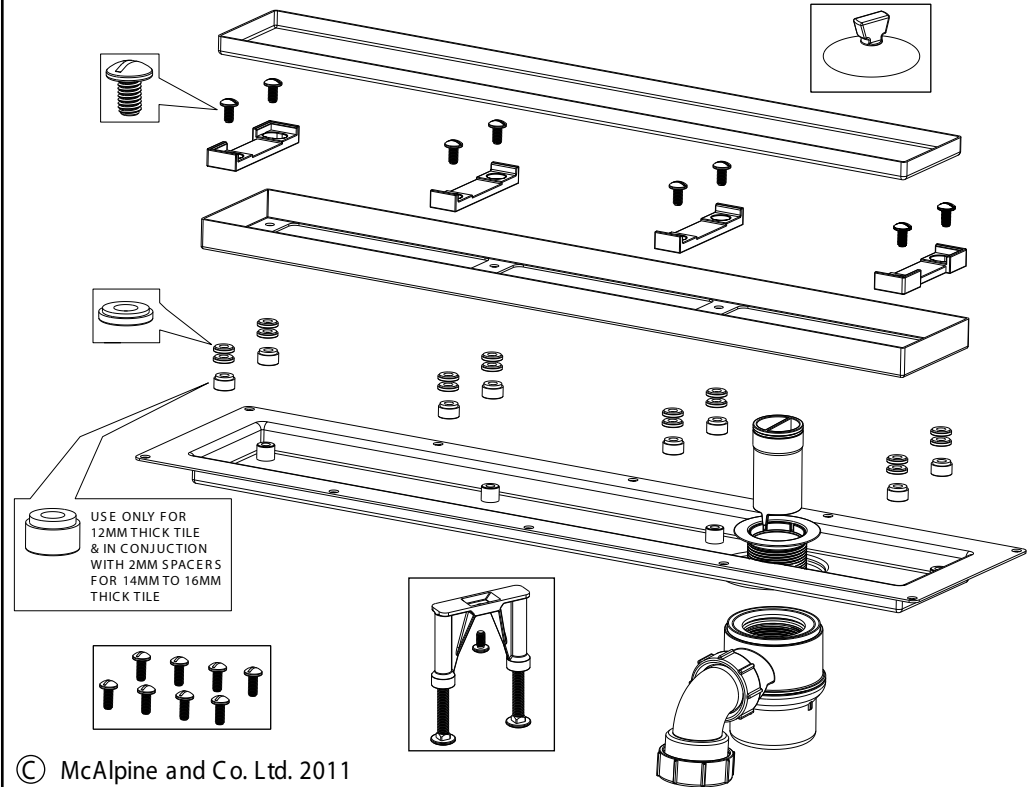

INSTALLATION GUIDELINES FOR CD600-B AND CD600-P CHANNEL DRAIN FOR TILED FLOORS

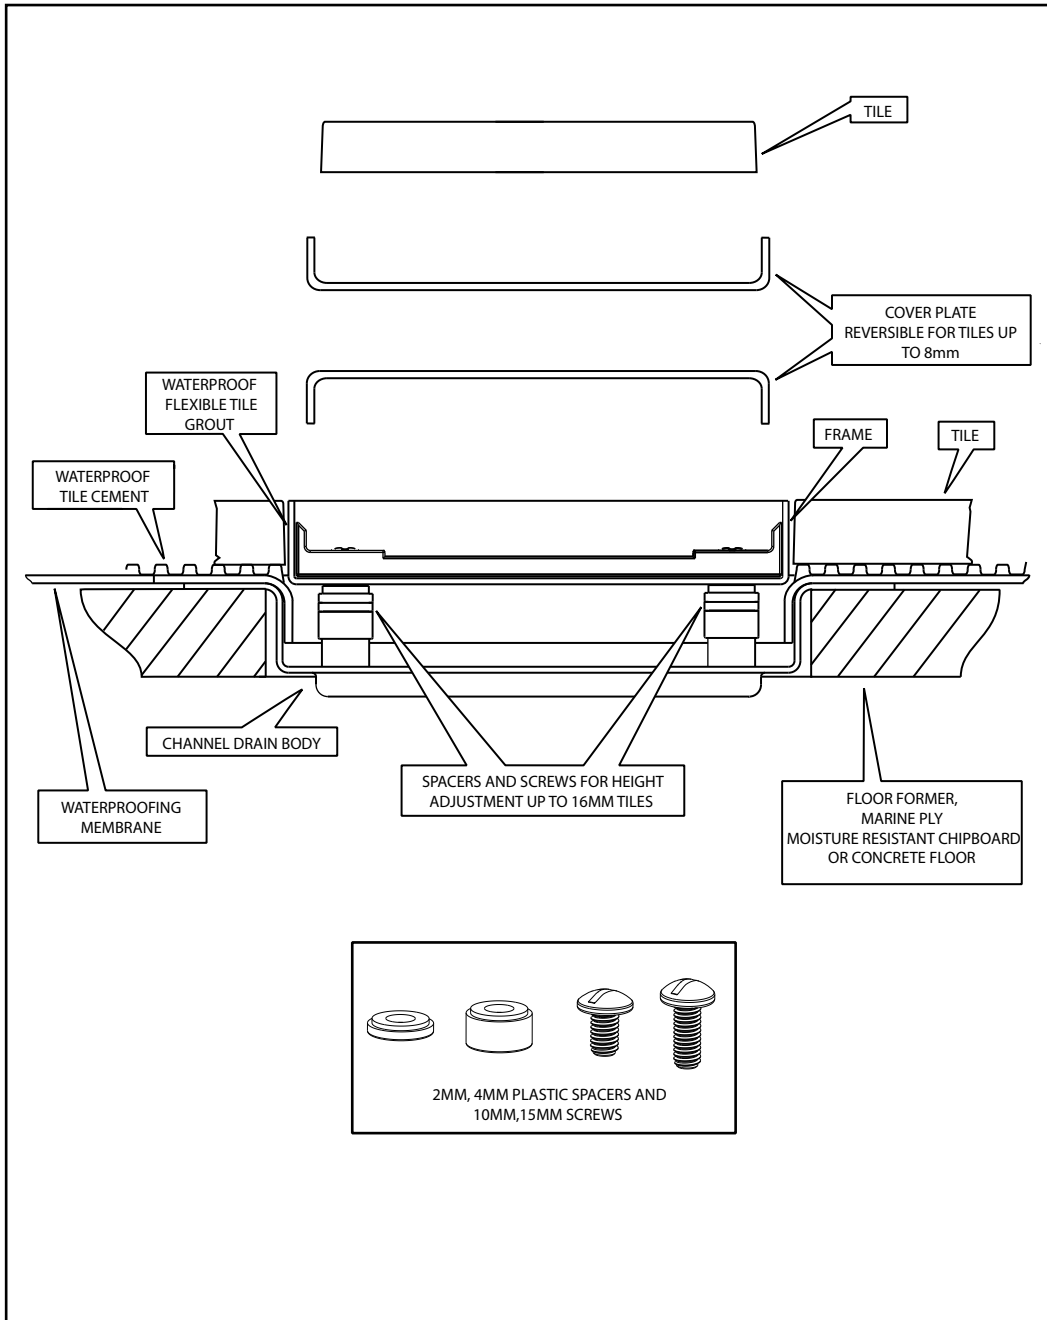

CHANNEL DRAIN CAN BE USED IN CONJUNCTION WITH

- Floor Former, moisture resistant chipboard or marine ply.
- Concrete floor installation, use adjustable support legs (If required)
- A gradient to the Channel Drain of 1:40 should be provided and a waterproofing membrane or tanking system must be installed.
- Waterproof tile adhesive and flexible tile grout should always be used.
- The Frame without Spacers suits tiles up to 8mm.
- Plastic Spacers and 15mm screws enable Frame adjustment to suit 10 -16mm tiles.
- Cover Plate is reversible to accommodate tiles up to 8mm.

McALPINE CHANNEL DRAIN SHOULD ONLY BE INSTALLED BY A COMPETENT PLUMBER AND OR SPECIALIST FLOORING CONTRACTOR